

# AC Line Filter: ET28



ET28V



ET28H



該当安全規格 (参考)

- 電気用品安全法
  - UL 1270 1409 1410
  - 1492 1950 6500
- IEC 60065 60950
- CSA C22.2 No.1 No.950

絶縁厚・絶縁距離

- ボビン厚 0.6 mm min
- 巻線間距離 3.2 mm min
- 巻線～コア間距離 1.6 mm min

**ET28V**

【端子接続図】

【基板設計推奨寸法】

推奨穴径  $\phi 1.2$

Parts Number	Inductance	Rated Current
ET28 V - 903	90.0 (mH)	0.80 (A)
ET28 V - 553	55.0 (mH)	1.00 (A)
ET28 V - 333	33.0 (mH)	1.30 (A)
ET28 V - 213	21.0 (mH)	1.60 (A)
ET28 V - 193	19.0 (mH)	2.00 (A)
ET28 V - 153	15.0 (mH)	2.30 (A)
ET28 V - 103	10.0 (mH)	2.60 (A)
ET28 V - 702	7.0 (mH)	3.50 (A)

**ET28H**

【端子接続図】

【基板設計推奨寸法】

推奨穴径  $\phi 1.2$


Parts Number	Inductance	Rated Current
ET28 H - 903	90.0 (mH)	0.80 (A)
ET28 H - 553	55.0 (mH)	1.00 (A)
ET28 H - 333	33.0 (mH)	1.30 (A)
ET28 H - 213	21.0 (mH)	1.60 (A)
ET28 H - 193	19.0 (mH)	2.00 (A)
ET28 H - 153	15.0 (mH)	2.30 (A)
ET28 H - 103	10.0 (mH)	2.60 (A)
ET28 H - 702	7.0 (mH)	3.50 (A)

1, Specifications are subject to change for improvement without notice.  
 2, Please request us detailed specification.

ET28V



ET28H

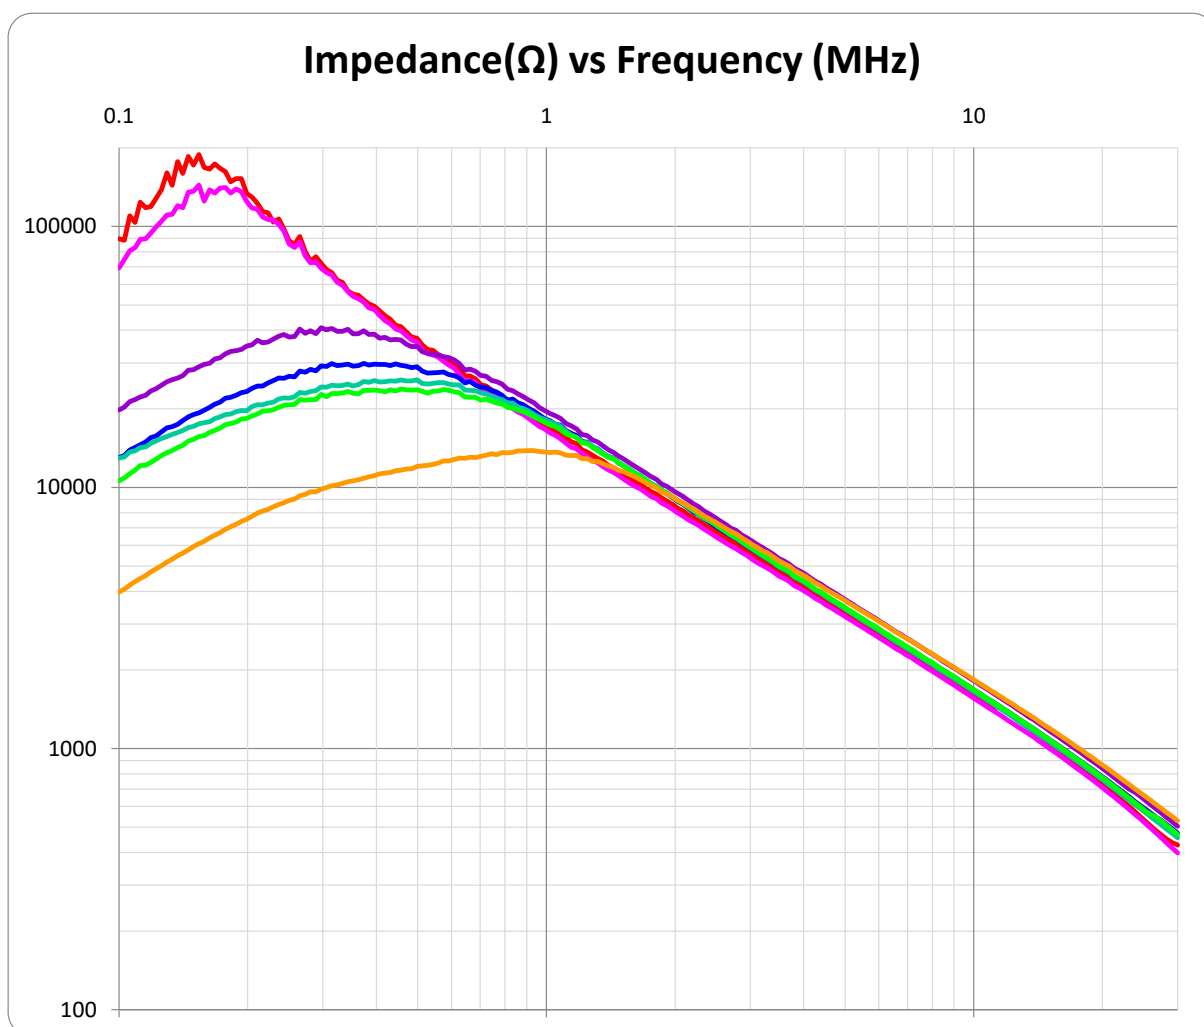

Model number	Impedance typ		Current max (A)	DCR max (m $\Omega$ )	Inductance typ (mH)	Wire size ( $\phi$ )
	(k $\Omega$ )	(kHz)				
ET28*-903	180	150	0.8	1.60	90.0	0.40
ET28*-553	140	170	1.0	1.00	55.0	0.45
ET28*-333	40	300	1.3	0.80	33.0	0.50
ET28*-213	30	400	1.6	0.50	21.0	0.55
ET28*-193	25	450	2.0	0.35	19.0	0.60
ET28*-153	23	500	2.3	0.25	15.0	0.65
ET28*-702	14	900	3.5	0.13	7.0	0.80

1. Specifications are subject to change for improvement without notice.
2. Please request us detailed specification.