


Choke coil



DR0810 series

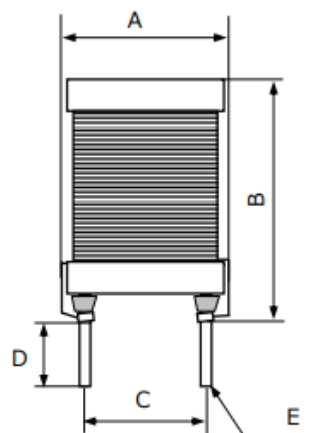

外形寸法 (mm)

A	B	C	D	E
10.0 max	13.0 max	5.0±1.0	10min	0.6±0.1

電気的特性

PART No.	INDUCTANCE (uH) [±20%] ※1	DCR (mΩ) [MAX]	RATED CURRENT(A) ※2
DR0810-100	10	27	3.40
DR0810-150	15	34	2.90
DR0810-220	22	50	2.40
DR0810-330	33	68	1.90
DR0810-470	47	100	1.50
DR0810-680	68	126	1.30
DR0810-101	100	210	1.00
DR0810-151	150	275	0.90
DR0810-221	220	475	0.70
DR0810-331	330	610	0.60
DR0810-471	470	920	0.50
DR0810-681	680	1330	0.40
DR0810-102	1000	2025	0.30
DR0810-152	1500	3100	0.20


※1 インダクタンス測定条件：100kHz,1.0V

※2 定格電流決定基準：インダクタンスが初期値より90%となる電流値、または
温度上昇がΔT=40℃となる電流値の何れかにおいて小さい方の電流値

- 1, Specifications are subject to change for improvement without notice.
- 2, Please request us detailed specification.

DR0810 series

直流重畳特性

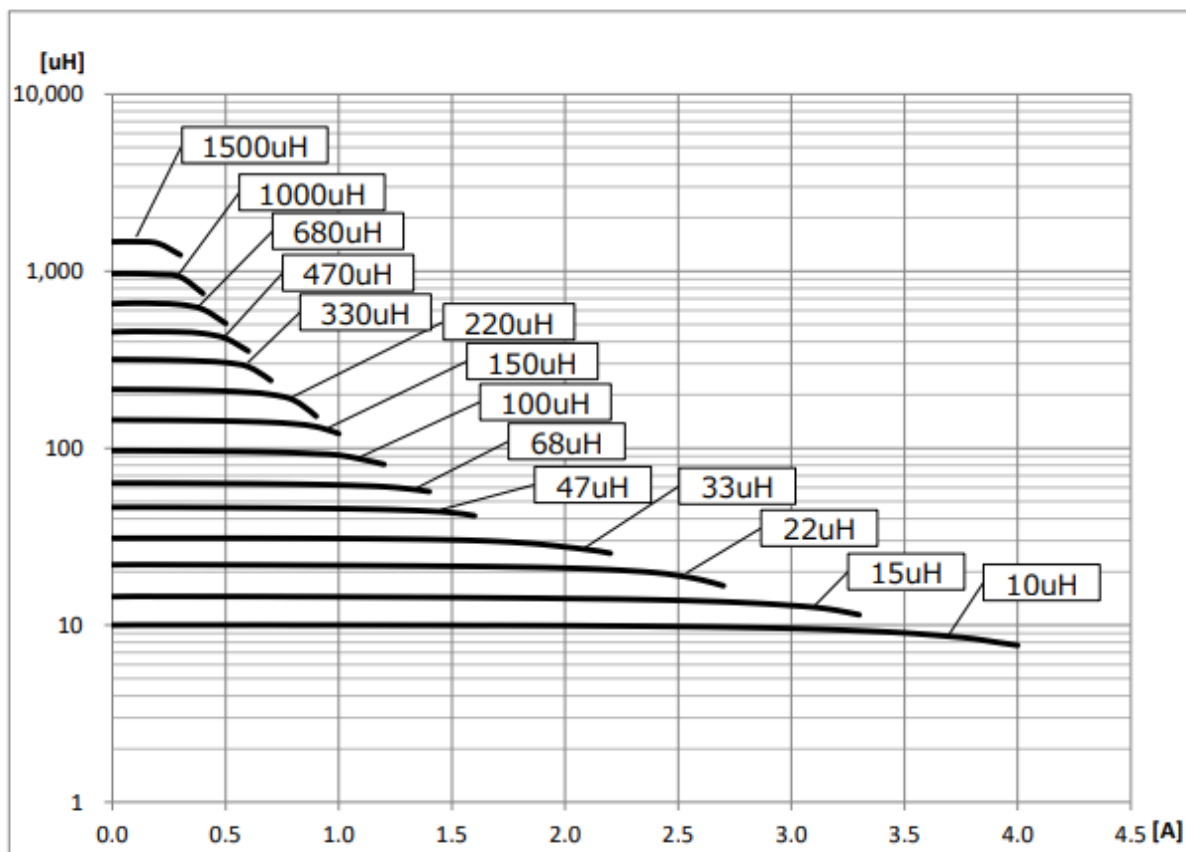

お問い合わせ
06-6252-8839 / info@alphatrans.co.jp
株式会社アルファトランス

1, Specifications are subject to change for improvement without notice.
2, Please request us detailed specification.